

Purifier® Delta® Series Class II, Type A2 & B2 Safety Cabinets

DUCTWORK

Thermoplastic Duct

PVC exhaust duct in 10' length. A Female Duct Coupling and solvent cement are required to join two sections.

Catalog #	4718900	7027200	5602000
Nominal Diameter	8"	10"	12"
Actual OD	8.625"	10.750"	12.750"
Actual ID	8.250"	10.375"	12.375"
Shipping Weight	35 lbs. (16 kg)	50 lbs. (23 kg)	65 lbs. (29 kg)

Female Duct Couplings

PVC coupling joins two sections of Thermoplastic Duct.

Catalog #	4719200	7027500	5602300
Nominal Diameter	8"	10"	12"
Shipping Weight	5 lbs. (2 kg)	5 lbs. (2 kg)	6 lbs. (3 kg)
Equivalent Resistance*	0	0	0

90° Elbows

PVC Elbow has belled end connections to receive Thermoplastic Duct or Male Duct Coupling directly.

Catalog #	4719000	7027300	5602100
Nominal Diameter	8"	10"	12"
Shipping Weight	10 lbs. (4 kg)	12 lbs. (5 kg)	14 lbs. (6 kg)
Equivalent Resistance*	15 ft.	20 ft.	25 ft.

Male Duct Couplings

PVC duct in 6" length. Facilitates connection between Remote Blowers #3668000, 3668001, or 3663500 and 90° Elbow.

Catalog #	7027800	7067300
Nominal Diameter	10"	12"
Actual OD	10.750"	12.750"
Actual ID	10.375"	12.375"
Shipping Weight	5 lbs. (2 kg)	6 lbs. (3 kg)

Flexible Duct Connections

Reduces vibration between the blower and PVC ductwork. Supplied with two clamps.

Catalog #	7034200	5621400
Nominal Diameter	11" for use with 10" fittings	13" for use with 12" fittings
Shipping Weight	5 lbs. (2 kg)	5 lbs. (2 kg)

Thermoplastic Duct Reducer

PVC coupling type reducer joins PVC duct of different diameters.


Catalog #	5606100
Nominal Size	10" x 12"
Shipping Weight	6 lbs. (3 kg)
Equivalent Resistance*	0

Zero Pressure Weathercaps

PVC Weathercap fits atop standard PVC duct, permits vertical discharge of effluent air above roofline for dispersion away from the building.

Catalog #	4722300	7095100	5622100
Nominal Diameter	8"	10"	12"
Shipping Weight	25 lbs. (11 kg)	30 lbs. (14 kg)	35 lbs. (16 kg)
Height	40"	48"	56"
Equivalent Resistance*	5 ft.	5 ft.	5 ft.

*Equivalent resistance is measured in feet of straight duct.

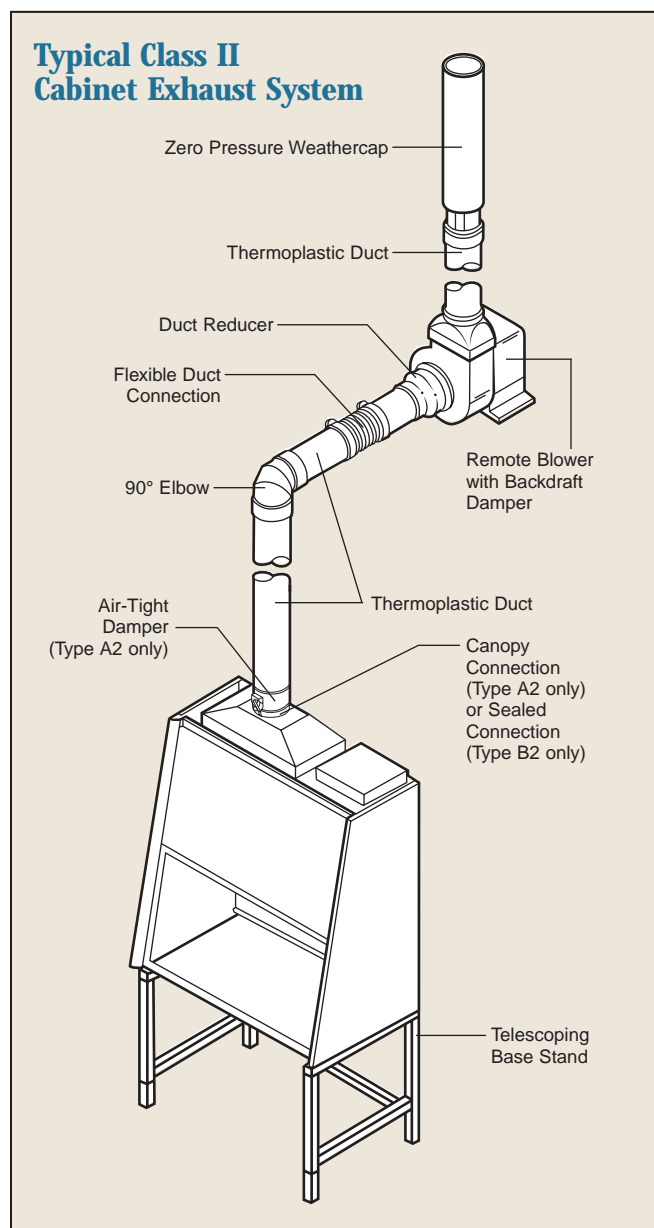

Contact Labconco at 800-821-5525 or 816-333-8811 for technical assistance in selecting the right ductwork for your installation.